



COMMERCIAL
CONTROL
VALVES

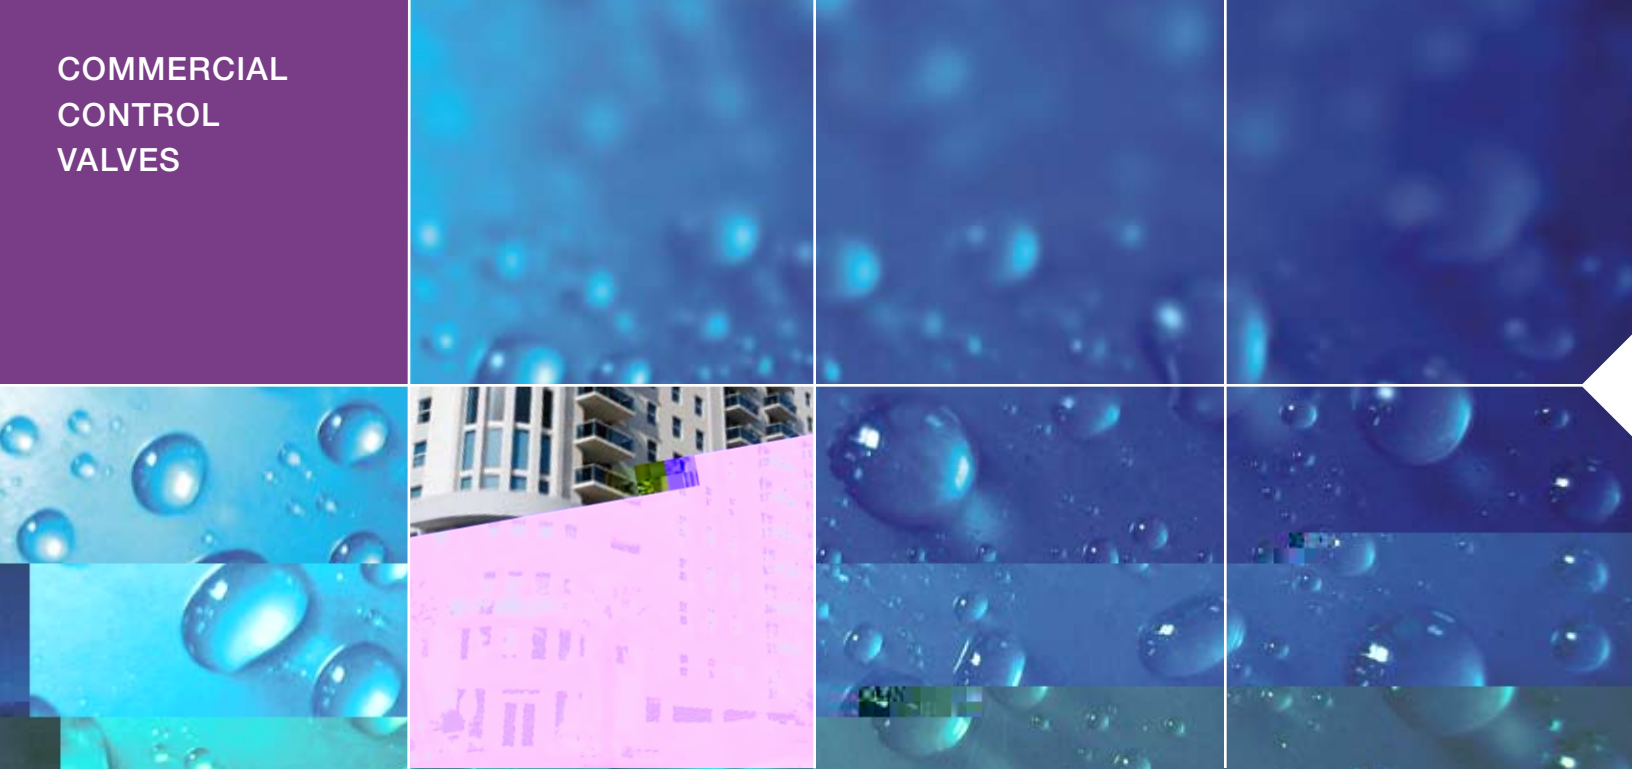

Ma C Va

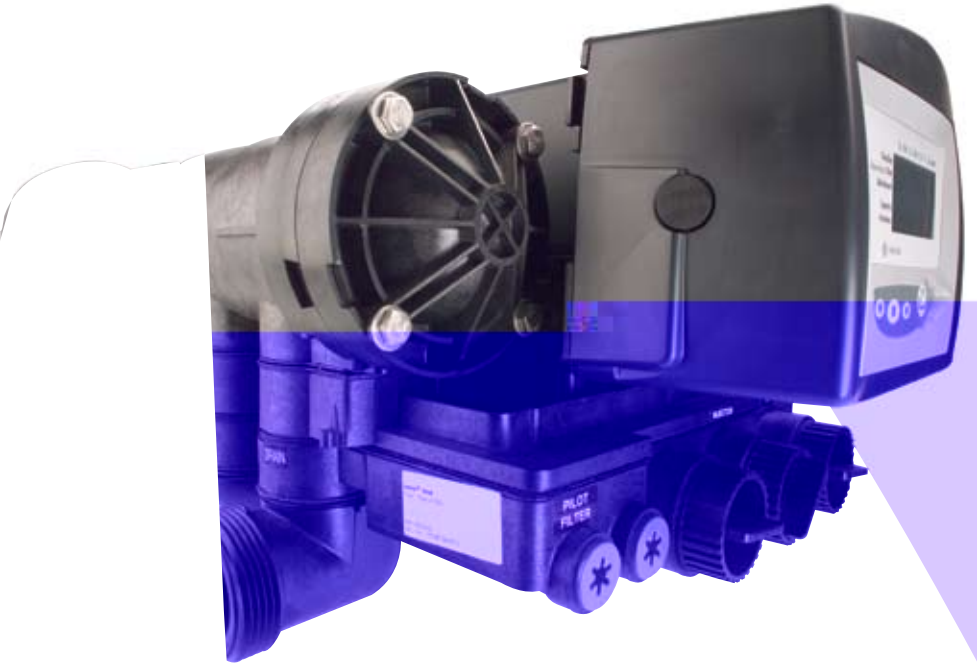

C

The Pentair Water® Magnum Control Valve is one of the most versatile valves on the market.

L

- All-electronic control platform
- 24-hour super-capacitor backup – no battery necessary
- Remote mount kit allows programming module to be installed up to 40 feet away
- Universal controller – works on all Autotrol® brand valves
- Automatic capacity calculations – no math or salt tables necessary
- 12-volt operation

The Logix series offers the ultimate in control for the Magnum® valve. Simple 3-step programming and installation makes this electronic controller the industry leader.



742

C f

- Simple, economic electronic time clock (chronometric)
- 7- or 99-day regeneration settings
- Filter or conditioner setting in one control
- Fully programmable cycle times
- Salt setting in 1-pound increments (lbs/cu ft)
- Single controller operates Autotrol 255, 263, 268, 278 models, and Pentair Water Magnum and Magnum IT with one controller

762 D

- Simple, economic electronic demand (volumetric)
- Calendar override – 99 day
- 28-day variable reserve
- Filter or conditioner setting in one controller
- Automatic capacity calculations
- Fully programmable cycle times
- Salt setting in 1-pound increments (lbs/cu ft)
- Operates 255, 263, 268, 278, and Magnum IT with one controller

764 D

Sal . . . a . . . a . . . 762 . . . :

- Multi-tank applications (twin alternating, multi-tank parallel)
- Control lockout
- Remote regeneration



F ()

Service @ 15 psi (1.03 bar) drop	76 gpm (17.3 m ³ /hr)
Backwash @ 25 psi (1.72 bar) drop	89 gpm (20.2 m ³ /hr)
Service	Cv = 19.5 (Kv = 17)
Backwash	Cv = 17.8 (Kv = 19.9)

C /D

Tank Thread	4-inch 8 UN
Inlet/Outlet	2-inch: connections NPT or BSPT, Female, CPVC
Brine Line	3/4-inch NPT
Drain Line*	1-1/2-inch: connections for NPT or BSPT, Female, CPVC
Riser Tube Diameter	1-1/2-inch
Riser Installation	Above top of tank 5/8-inch (±1/8-inch)
Pilot Drain and Auxiliary Hydraulic Output	1/4-inch tube fitting

*Valve installed drain flow controls available (5 – 40 gpm). If higher backwash flow is needed, an external flow control will be required.


D /

Valve Body	Thermoplastic
O-rings	EPDM
Injector	7 sizes available: 14, 16, 18, 21, 24, 30, 36
Working Pressure	25 psi – 100 psi (1.72 bar – 6.9 bar)
Water Temperature	35° – 100°F (2° – 38°C), 120°F (49°C) Ambient


Top Mount or Side Mount Configuration




Injector 1000441
For 14-inch Tanks

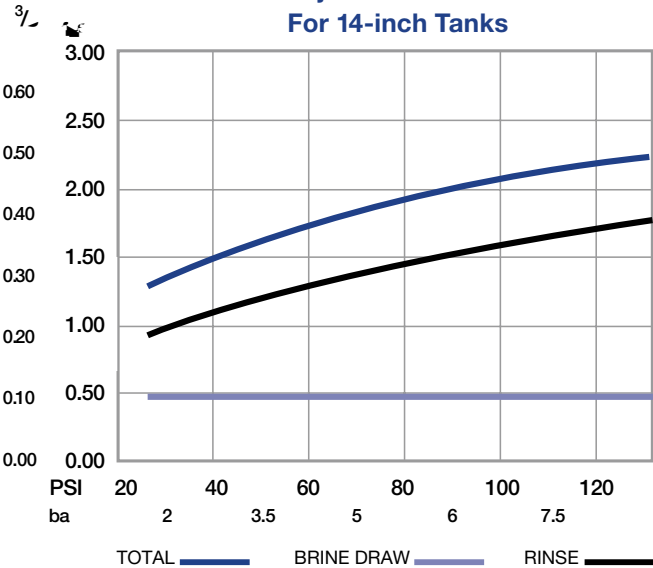


Injector 1000442
For 16-inch Tanks

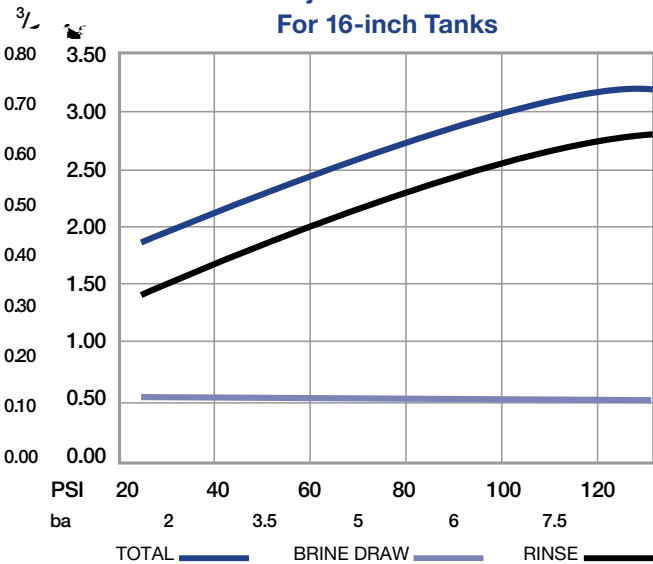

Injector 1000443
For 18-inch Tanks

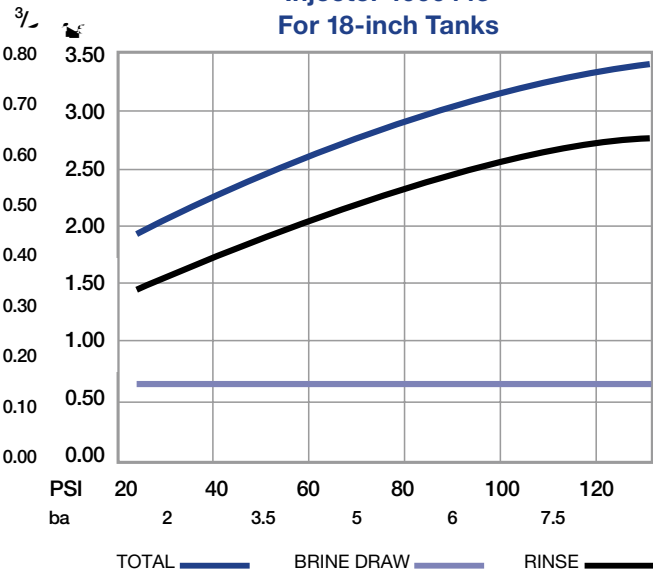


Injector 1000444
For 21-inch Tanks

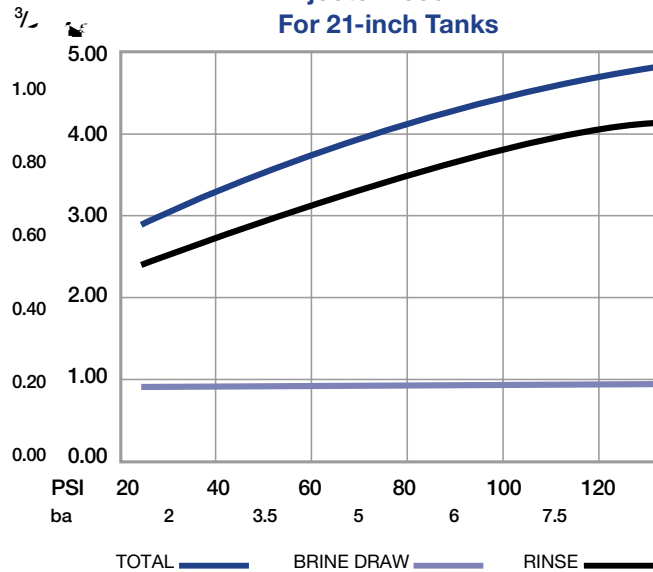





**Injector 1000445
For 24-inch Tanks**

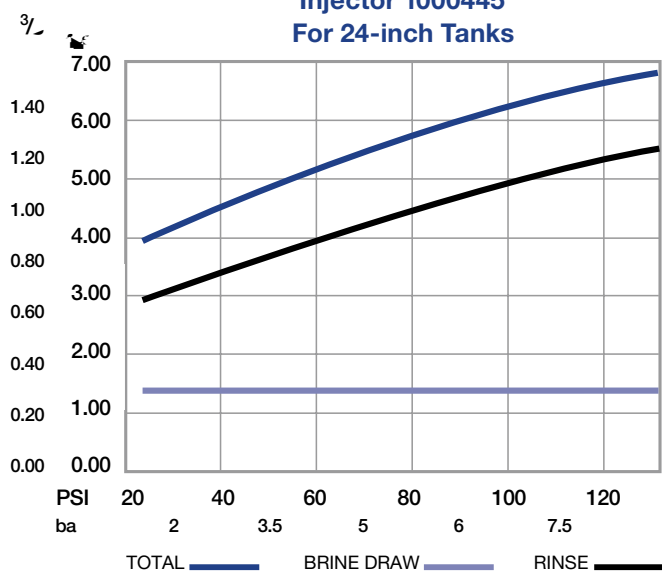

**Injector 1000446
For 30-inch Tanks**


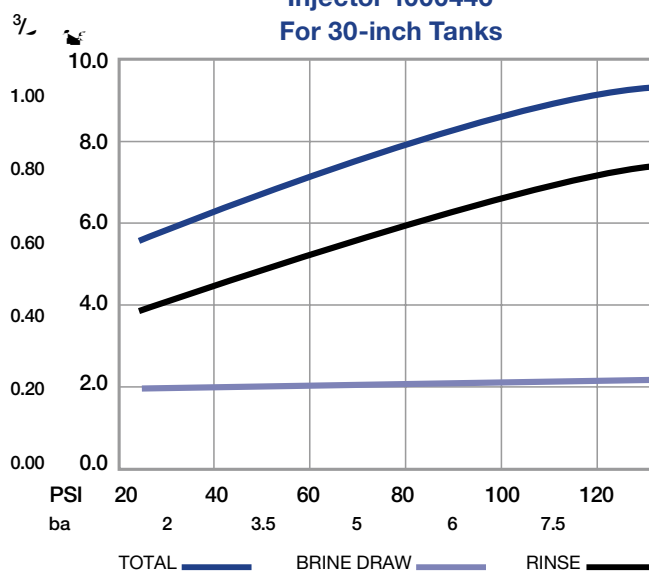


**Injector 1000447
For 36-inch Tanks**

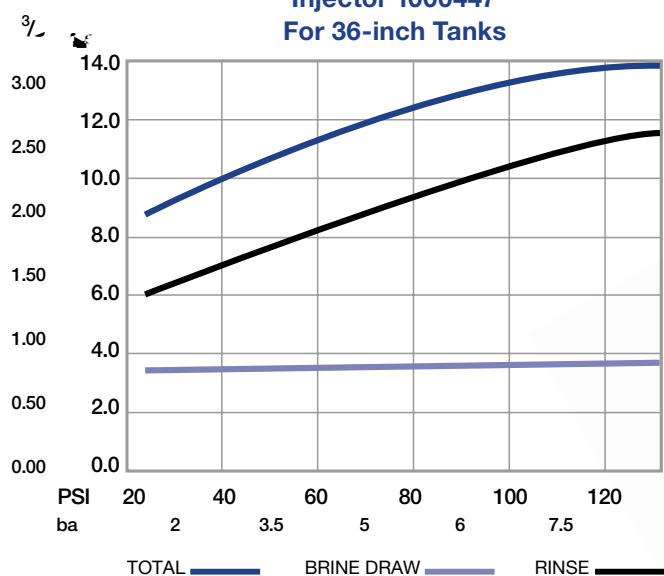

NOTE: Brine draw and rinse rates on empty tank.



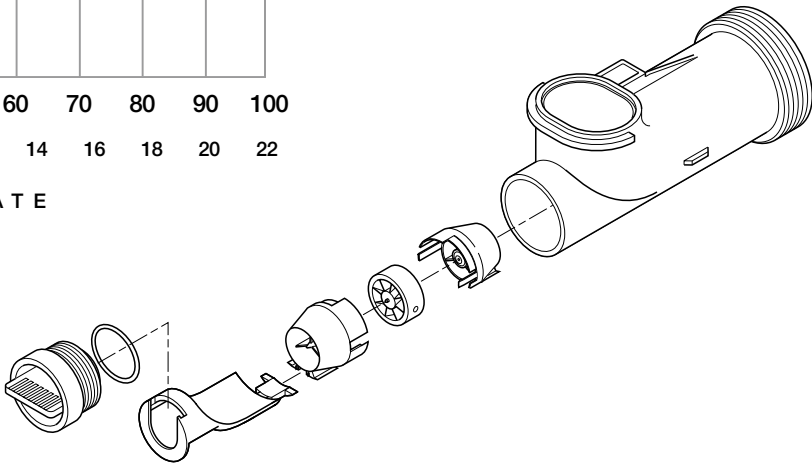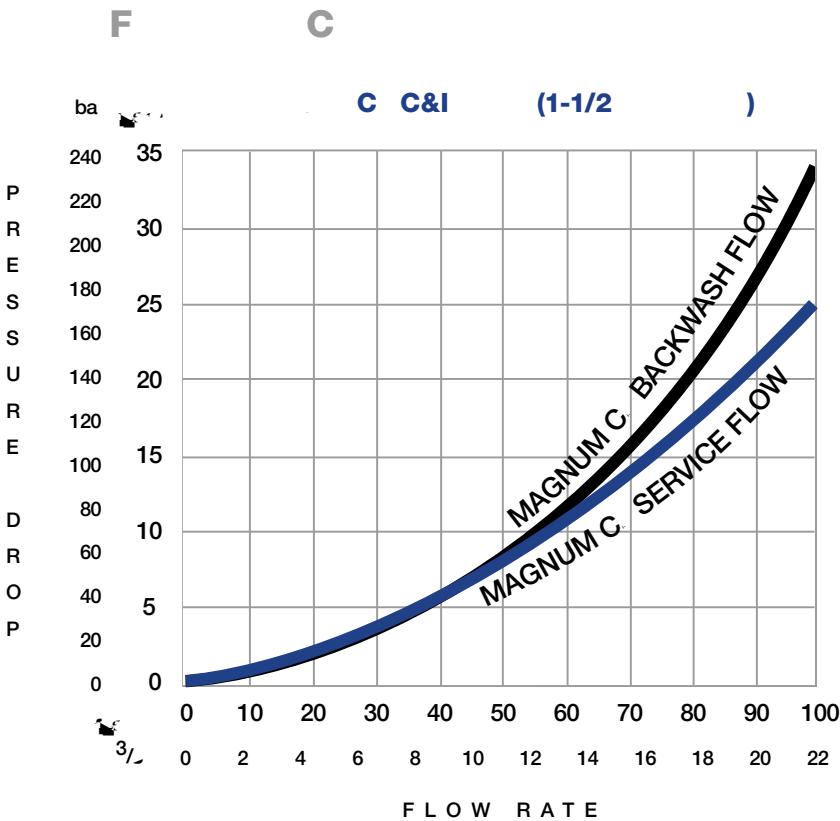

F I	Normal Operating Range	2 - 80 gpm (0.45 - 18.1 m³/hr)
	Peak Operating Range	1 - 100 gpm (0.22 - 22.7 m³/hr)
	Normal Accuracy Range	±3%

E F	2.0 I	
	Normal Operating Range*	5.0 - 225 gpm (0.50 - 51.0 m³/hr)
	Normal Accuracy Range	±3%
Connections		2-inch: connections NPT or BSPT, Female, CPVC


*Recommended maximum continuous duty flow rate of 2-inch turbine is 70% of maximum flow rate.



FA	Threaded Stainless Steel	4-inch 8 UN
	Flanged Stainless Steel	6-inch



1-1/2-

C

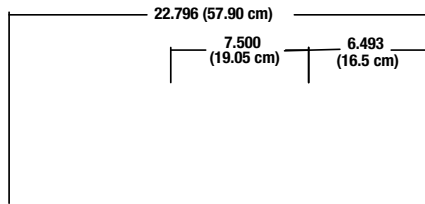

2-

I

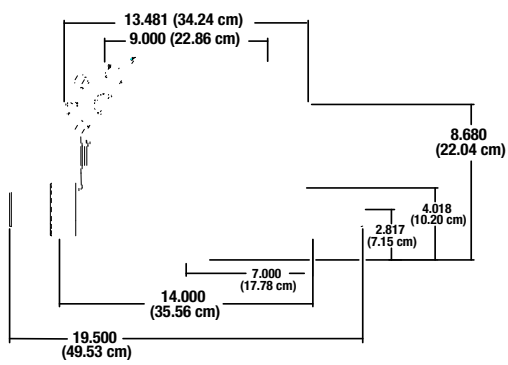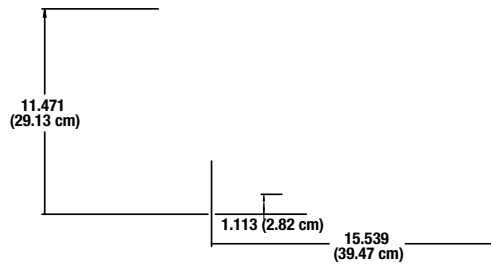



20580 E. A. . . .
B. . . . WI 53045
T : 262.784.4490
Fa : 262.784.7794

5730 N. G. Pa R a
M. a . . . WI 53209
T : 262.238.4400
Fa : 262.238.4402

2010 P. a R. . . . a F. a. . . , LLC
1017972 R. F FE10

C. . . . Ca. : 800.279.9404

. . . . a a