


# FLECK® 2900s

## 2-INCH CONTROL VALVE

MADE IN THE  
**USA**  
OF FOREIGN & DOMESTIC PARTS

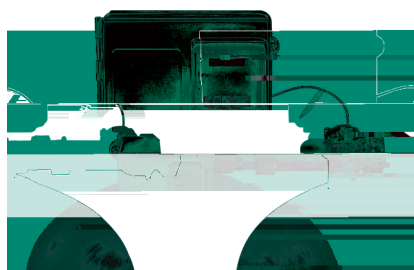

### FEATURES/BENEFITS

Lead-free brass valve body for superior strength and durability

Continuous service flow rate of 106 GPM with a backwash of 36 GPM

Backwash capability accommodates softener tanks up to 36" and filter up to 24" in diameter

Fully adjustable 3- or 5-cycle control for efficient and reliable water treatment system

Designed for single or multiple tank systems

Environmental protective cover for water resistance, corrosion resistance, and UV stability

Time-tested, hydraulically-balanced piston for service and regeneration

Rugged-built electromechanical timer designed with heavy duty 3/8" wide plastic gears

### OPTIONS

Filter or softener control valves

Downflow co-current or upflow counter-current regeneration

No hard water bypass piston

Brine cam auxiliary switch

Electromechanical timer auxiliary switch

Hot water

Treated water regeneration

Versatile top or side mount

Electromechanical 7- or 12-day time clock, meter delayed, or meter immediate regeneration

**NXT-** Network controller uses on-board communication capabilities to link multiple valves (via off-the-shelf CAT3, CAT5, or better cables) for system types 4,5,6,7,9, and 14

**XT-** Offers a two-line, 16 character LCD backlit display for easy entering of master and user programing as well as view of diagnostics

**Electromechanical Timer-** Simple to adjust and easy to service with quick access to all internal components



TESTED and CERTIFIED by the WQA to NSF/ANSI Standard 61 Section 8 Material Safety Only.



TESTED and CERTIFIED by the WQA to NSF/ANSI Standard 372 for Lead Free Compliance.



UL recognized to 979



Restriction of Hazardous Substance Compliant

## VALVE SPECIFICATIONS

|                |                  |
|----------------|------------------|
| Valve Material | Lead-free brass* |
| Inlet/Outlet   | 2" NPTF/BSPF     |
| Cycles         | 5                |

## FLOW RATES (50 PSI INLET) – VALVE ALONE

|                              |                                  |
|------------------------------|----------------------------------|
| Continuous<br>15 psi drop    | 106 GPM (24.1 m <sup>3</sup> /h) |
| Peak<br>25 psi drop          | 140 GPM (31.8 m <sup>3</sup> /h) |
| Cv<br>flow at 1 psi drop     | 27.5                             |
| Max. Backwash<br>25 psi drop | 36 GPM (8.2 m <sup>3</sup> /h)   |

## REGENERATION

|                    |                          |
|--------------------|--------------------------|
| Downflow/Upflow    | Both                     |
| Adjustable Cycles  | Yes                      |
| Time Available     |                          |
| Electromechanical: | 0 - 164 min/regeneration |
| NXT:               | 0 - 240 min/cycle        |
| XT:                | 0 - 240 min/cycle        |

## METER INFORMATION

|                      |                                                         |
|----------------------|---------------------------------------------------------|
| Meter Accuracy       |                                                         |
| 2" Paddle:           | 3 - 150 GPM ± 5%<br>(.68 - 34 m <sup>3</sup> /h)        |
| Meter Capacity Range |                                                         |
| 2" Standard:         | 1,250 - 21,250 gal<br>(5 - 75 m <sup>3</sup> )          |
| 2" Extended:         | 6,250 - 106,250 gal<br>(24 - 375 m <sup>3</sup> )       |
| NXT:                 | 1 - 9,900,000 gal<br>(0 - 37,476 m <sup>3</sup> )       |
| XT:                  | 1,000 - 9,900,000 gal<br>(3.8 - 37,476 m <sup>3</sup> ) |

## DIMENSIONS

|                            |                        |
|----------------------------|------------------------|
| Distributor Pilot          | 1..9" O.D. (50 mm)     |
| Drain Line                 | 1" NPTM                |
| Brine Valve                |                        |
| 1600 or 1650:              | 3/8"                   |
| 1700 or 1710               | 1/2"                   |
| Injector System            | 1600 or 1700           |
| Mounting Base              | 4" - 8 UN              |
| Height from<br>Top of Tank | 12" (305 mm)           |
| Riser Tube Diameter        | 1-1/2" (38 mm)         |
| Riser Height               | 1/4" Below top of tank |

## TYPICAL APPLICATIONS

|                |                                                      |
|----------------|------------------------------------------------------|
| Water Softener | 14 - 36" diameter                                    |
| Filter         | 14 - 24" diameter<br>based on 10 GPM/ft <sup>2</sup> |

## ADDITIONAL INFORMATION

|                               |                                 |
|-------------------------------|---------------------------------|
| Electrical Rating             | 24/110/220V;<br>50/60 Hz        |
| Estimated Shipping Weight     |                                 |
| Time Clock:                   | 33 lbs                          |
| Metered Valve:                | 40 lbs                          |
| Pressure                      |                                 |
| Hydrostatic:                  | 300 psi<br>(20 bar)             |
| Working:                      | 20 - 125 psi<br>(1.4 - 8.5 bar) |
| Temperature                   |                                 |
| Cold Water Valve:             | 34 - 110°F (1 - 43°C)           |
| Hot Water Valve:              | 34 - 180°F (1 - 82°C)           |
| Time Clock, 1600 Brine System |                                 |
| Hot Water Valve:              | 34 - 150°F (1 - 66°C)           |
| 1700 Brine System             |                                 |

\*As defined in the U.S. EPA Safe Drinking Water Act; the product also meets California Proposition 65 Standards for lead-free brass.



## FILTRATION & PROCESS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209  
P: 262.238.4400 | WWW.PENTAIRAQUA.COM | CUSTOMER CARE: 800.279.9404 | tech-support@pentair.com

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

40738 REV D JL14 © 2013 Pentair Residential Filtration, LLC. All Rights Reserved.